

The Perfect Balance between Precision and Practicality







G3.150 **G**3.128NR

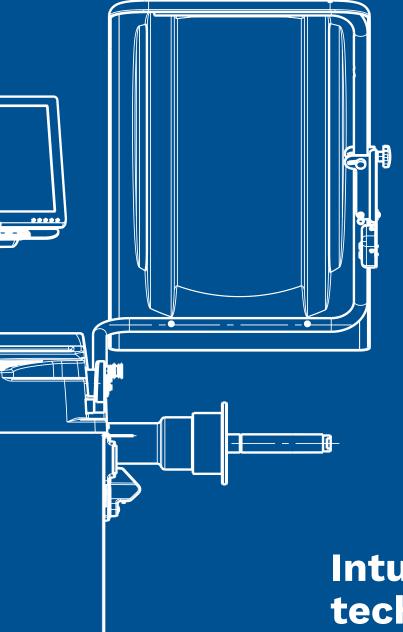

Impeccable precision:

automatic wheel data acquisition and laser blade

Practical design:

everything has a place, everything is in the right spot


Intuitive technology:


graphics and colors are studied to facilitate the use of the wheel balancer



Electronic wheel balancers with microprocessor with wheel stops automatically in both outside and inside unbalance position. Quick selection with internal data gauge. Automatic storage of distance and diameter.













Modern balancing system to minimize wheel weights consumption.







Optimization of the space to make everything handy and easy.



Whether they are standard or optional, every accessory has its own place.




External data gauge.

(Optional for G3.128NR and G3.150 models).



Model G3.128NR


Model G3.150WS









Technical data






G3.128NR

	ltem no.
GP3.150WSPLUS	RAV.G3150.201287
G3.150WSPLUS	RAV.G3150.201331
GP3.150WS	RAV.G3150.201386
G3.150WS	RAV.G3150.201430
GP3.150S	RAV.G3150.201485
G3.150S	RAV.G3150.201539
G3.150	RAV.G3150.201584
GP3.128NR	RAV.G3128.201300
G3.128NR	RAV.G3128.201355





G3.150

	G3.128NR All models	G3.150 All models		
Min. rim diameter	10"	10"		
Max. rim diameter	26"	26"		
Min. rim width	1.5"	1.5"		
Max. rim width	22"	22"		
Max. wheel weight	70 kg	70 kg		
Balancing accuracy +/-	1 g	1 g		
Measuring time	6 s	6 s		
Measuring speed	100 rpm	100 rpm		
Power supply	230V/50-60/1ph	230V/50-60/1ph		



		GP3 150WSPLUS	G3 150WSPLUS	GP3 150WS	G3 150WS	GP3 150S	G3 150S	G3 150	GP3 128NR	G3 128NR
000	GAR111 Passenger car cone set (Ø 44 - 112 mm)	S	S	s	s	s	S	s	S	S
1	GAR121 Protection disk	S	S	0	0	0	0	0	0	0
	GAR132 Precision flange	s	s	0	0	0	0	0	0	0
Com	Wheel width measuring gauge (manual)	S	S	0	0	0	0	0	0	0
ø.	GAR345 Quick nut	S	S	-	s	-	S	s	_	s
10	GAR351 Locking hub	S	S	s	-	s	-	-	S	-
	GAR112 Centering cone	S	S	0	0	0	0	0	0	0
	GAR306 Wheel width gauge	0	0	-	-	s	S	0	0	0
	GAR379 laser blade + LED light	S	S	s	s	s	S	s	S	s
	GAR315 Run-out sonar	0	0	-	-	0	0	-	0	0
T	GAR377 Run-out sonar	0	0	0	0	-	-	-	_	-
	GAR332 Wheel width sonar	0	0	s	s	-	-	-	-	-
	GAR324 - GAR325 Wheel lift	0	0	0	0	0	0	0	0	0
TEq-Link	GAR358 Workshop connectivity software	0	0	0	0	0	0	0	0	0

S Standard **O** Optional



RAV Italy

Vehicle Service Group Italy S.r.l.

Via Filippo Brunelleschi 9 44020 Ostellato (FE) Italy

<u>\$\left\\$\ +39.051.6781511</u>

+39.051.846349 □ rav@ravaglioli.com **RAV France**

RAV France SARL

4, Rue De Longue Raie ZAC de la Tremblaie 91220 Le Plessis Pâté France

+33.1.60.86.88.16 +33.1.60.86.82.04

□ rav@ravfrance.fr

RAV Germany

BlitzRotary GmbH

Hüfinger Straße 55 78199 Bräunlingen Germany

\$\&\bigs\ +49.771.9233.0\$
\$\Bigs\ +49.771.9233.99\$ ☐ ravd@ravaglioli.com **RAV UK**

Vehicle Service Group UK Ltd

3 Fourth Avenue, Bluebridge Industrial Estate Halstead, Essex, CO9 2SY United Kingdom

\$\&\ +44.1787.477711\$
\$\Begin{array}{c} \ +44.1787.477720 \end{array}\$ □ rav@ravaglioli.com

DRJ19U(02)

